


Undercut anchor KH AA

555



Execution



▶ Anchor sleeve inc. hexagon bolt with locking ratchet in stainless steel A4

For use in

▶ For rear fixed facade panels

- ▶ Natural stone
- ▶ Artificial stone
- ▶ Manufactured stone
- ▶ Ceramics
- ▶ HPL
- ▶ Plastics
- ▶ Fibre cement
- ▶ Glass-fibre reinforced concrete
- ▶ Ceramic glass

Accessories

- ▶ Depth control guide for anchor hole ■54
- ▶ Torque wrench 2-6 Nm ■56
- ▶ Wrench socket DIN 3126 E6.3 ■57
- ▶ Special open jaw spanner AF9 ■56

Packaging



500 pieces

Surcharges

- ▶ If quantities lower than the packing unit are ordered, the following surcharges apply:
- ▶ 499 - 100 pieces + 10%
- ▶ 99 - 50 pieces + 25%
- ▶ 49 - 1 pieces + 40%


Comments

- ▶ * See appropriate approval table
- ▶ KEIL undercut anchors are monitored by approved bodies
- ▶ Other dimensions on request

Usage

- ▶ Application only as per approval and KEIL installation instructions

Undercut anchor KH AA

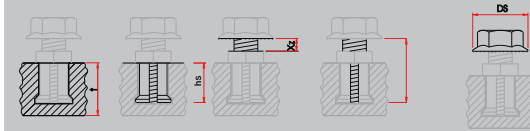

ETA
DIBt



6,0	4,0	1,5	M6x8,5	14		555 020 820
6,0	4,0	3,0	M6x10	14		555 020 742
8,0	5,5	0,0	M6x8,5	14		555 020 856
8,0	5,5	1,5	M6x10	14		555 020 724
8,0	5,5	3,0	M6x11,5	14		555 020 712
8,0	5,5	9,0	M6x17,5	14		555 020 846
9,5	7,0	0,0	M6x10	14	*	555 020 804
9,5	7,0	1,5	M6x11,5	14	*	555 020 780
9,5	7,0	3,0	M6x13	14	*	555 020 830
11,0	8,5	0,0	M6x11,5	14	*	555 020 823
11,0	8,5	1,5	M6x13	14	*	555 020 752
11,0	8,5	3,0	M6x14,5	14	*	555 020 777
13,0	10,0	0,0	M6x13	14	*	555 020 809
13,0	10,0	1,5	M6x14,5	14	*	555 020 734
13,0	10,0	3,0	M6x16	14	*	555 020 715
14,5	11,5	0,0	M6x14,5	14		555 020 700
16,0	13,0	1,5	M6x17,5	14		555 020 802
18,0	15,0	0,0	M6x17,5	14	*	555 020 815
18,0	15,0	1,5	M6x19	14	*	555 020 756
18,0	15,0	6,0	M6x23,5	14	*	555 020 826